

rush

PRODUCTIONS LLP



rush

PRODUCTIONS LLP

#14, Bachammal Road, Cox town, Bangalore - 560 005.

www.rushproductions.in | Ph : +91 7090988088


The background is a dark, textured surface resembling crumpled paper or stone. It is decorated with thin, gold-colored geometric lines. A large triangle is formed by lines on the left and bottom. Another line runs diagonally from the top right towards the center. In the bottom right corner, there is a series of parallel diagonal lines.

rush

PRODUCTIONS LLP

INDOOR LED CATALOGUE

RP - INDOOR LED

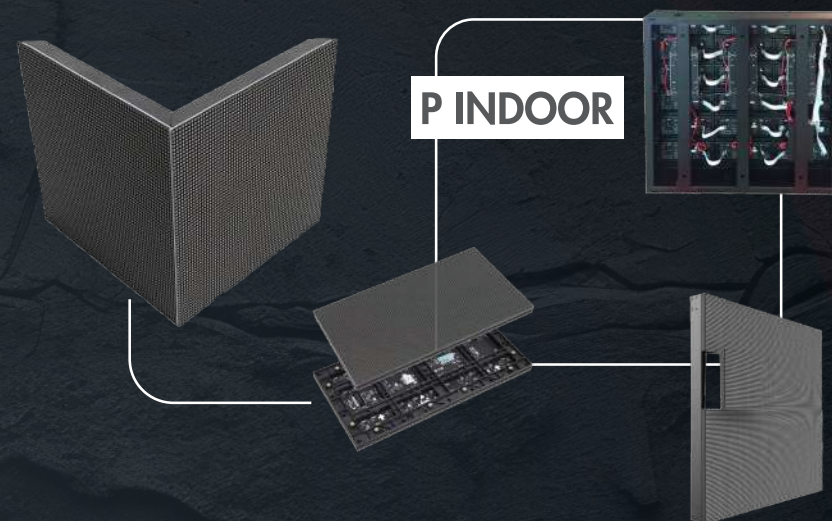

Features

- High refresh rate / Low refresh rate
- High grayscale
- High Brightness
- Wide color gamut
- Lightweight Structure
- Excellent Display Effect
- Stable Performance

FIXED



Userfriendly



Wide View Angle



Noise Free



Fast Installation



Easy Repair



Good Heat Control



Super Light



High brightness




High Refresh Rate

Note: The picture is for reference only and may not represent the final product

[illegible]

RD - INDOOR DIECAST



Features

- High refresh rate / Low refresh rate
- High grayscale
- High Brightness
- Wide color gamut
- Lightweight Structure
- Excellent Display Effect
- Stable Performance

FIXED



User-friendly



Wide View Angle



Noise Free



Magnet



Fast Installation



Easy Repair



Good Heat Control



High Contrast




High Refresh Rate

Note: The picture is for reference only and may not represent the final product

[illegible]

RX - INDOOR DIECAST SLIM

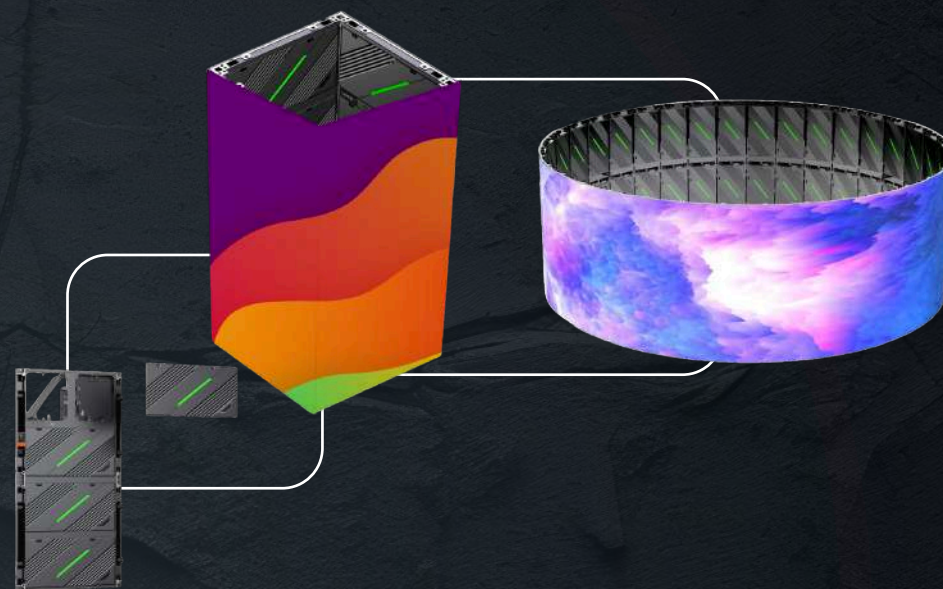

Features

- High refresh rate / Low refresh rate
- Various panel sizes: 500x500/750/1000x40mm; 500/750/1000x250x40mm , All sizes can be mixed splicing
- Flexible Splicing: Mal-posed splicing/90° Rotated splicing/ Right angle/Concave & Convex.
- Wireless connection between modules and cabinet.
- Hidden wiring design, clean backside.
- Front and Rear maintenance.
- Fast locks (Optional)
- Intelligent modules (Optional)
- Dual backups (Optional)
- GOB Technology (Optional)
- High brightness for SEMI-OUTDOOR (Optional)
- Customizable back cover
- Wall mounting/ Back-strip/Hanging /Stacking Installation.

FIXED



Userfriendly



Wide View Angle



Noise Free



Fast Installation



Easy Repair



Good Heat Control



Super Light



High brightness




High Refresh Rate

Note: The picture is for reference only and may not represent the final product

TECHINICAL SPECIFICATIONS

	Parameter Name	P1.5	P1.9	P2.5	P3.9
Cabinet	Material	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum
	Size	500x500/750/1000x40mm; 500/750/1000x250x40mm	500x500/750/1000x40mm; 500/750/1000x250x40mm	500x500/750/1000x40mm; 500/750/1000x250x40mm	500x500/750/1000x40mm; 500/750/1000x250x40mm
	Weight	4.9/6.1/9.2 & 2.5/3.6/5.2kg	4.9/6.1/9.2 & 2.5/3.6/5.2kg	4.9/6.1/9.2 & 2.5/3.6/5.2kg	4.9/6.1/9.2 & 2.5/3.6/5.2kg
	Pixel Per Panel	320x320/480/640 320/480/640x160pixels	256X256/384/512*256/384 512x128 pixels	200X200/300/400 & 200 300/400x100 pixels	128x128/192/256 & 128/192 256x64 pixels
	Maintance	Front and Rear	Front and Rear	Front and Rear	Front and Rear
	Ingress Protection (IP)	Front IP40/Rear IP10	Front IP40/Rear IP10	Front IP40/Rear IP10	Front IP40/Rear IP10
Module	LED Type	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
	Pixel Pitch	1.5mm	1.5mm	1.5mm	1.5mm
	Pixel Density	409600pixels/m ²	262144pixels/m ²	160,000pixels/m ²	65536pixels/m ²
	Module Dimension	250mm×250mm	250mm×250mm	250mm×250mm	250mm×250mm
	Module Weight	0.41kg/pc	0.41kg/pc	0.41kg/pc	0.41kg/pc
Optical	Calibration	Support brightness and chroma	Support brightness and chroma	Support brightness and chroma	Support brightness and chroma
	White Balance Brightness	800cd/m ²	800cd/m ²	800cd/m ²	900cd/m ²
	Standard Color Temperature	2,000K~9,300K Adjustable	2,000K~9,300K Adjustable	2,000K~9,300K Adjustable	2,000K~9,300K Adjustable
	Beam Angle (Hor/Ver°)	155° 155°	155° 155°	155° 155°	155° 155°
	Contrast Ratio	5000:1	5000:1	5000:1	5000:1
Electronic	Input Power <Max>	435±10%W/m ²	435±10%W/m ²	435±10%W/m ²	435±10%W/m ²
	Input Power <Typical>	145±10%W/m ²	145±10%W/m ²	145±10%W/m ²	145±10%W/m ²
	Power Voltage	100~240VAC	100~240VAC	100~240VAC	100~240VAC
Performance	Frame Changing Frequency	50&60Hz	50&60Hz	50&60Hz	50&60Hz
	Refresh Rate	≥3840Hz	≥3840Hz	≥3840Hz	≥3840Hz
	Processing Depth	≥14bit	≥14bit	≥14bit	≥14bit
	Video Support	2K HD, 4K UHD	2K HD, 4K UHD	2K HD, 4K UHD	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	100,000 H	100,000 H	100,000 H	100,000 H
	Working Temperature/ Humidity Range (°C/RH)	-10°C~+45°C/10~70%RH	-10°C~+45°C/10~70%RH	-10°C~+45°C/10~70%RH	-10°C~+45°C/10~70%RH
	Storage Temperature / Humidity Range (°C/RH)	-20°C~+55°C/10~80%RH	-20°C~+55°C/10~80%RH	-20°C~+55°C/10~80%RH	-20°C~+55°C/10~80%RH

XL - INDOOR DIECAST ALUMINUM

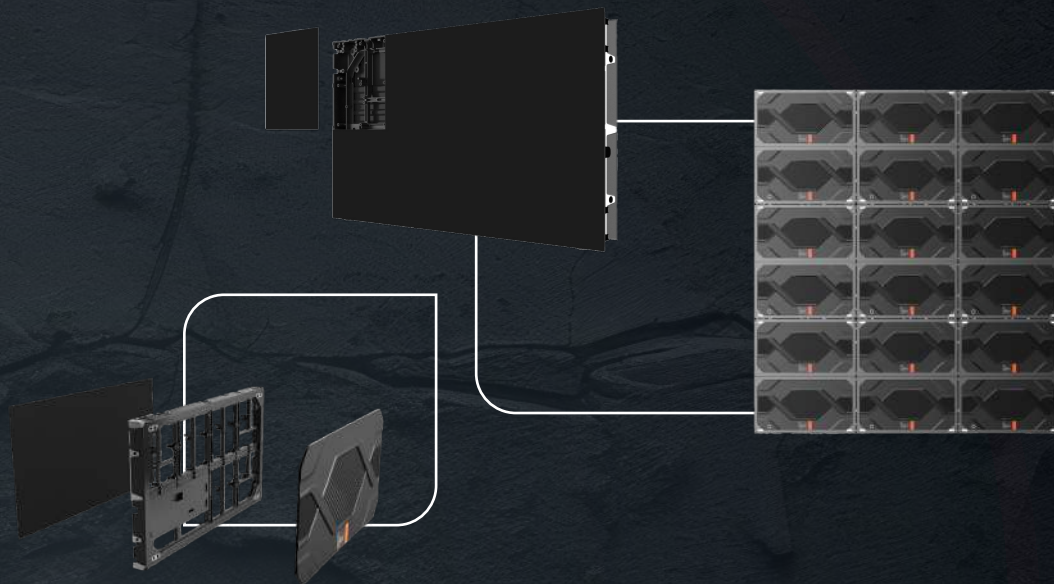

Features

- High refresh rate / Low refresh rate
- High grayscale
- High Brightness
- Wide color gamut
- Lightweight Structure
- Excellent Display Effect
- Stable Performance

FIXED



Userfriendly



Wide View Angle



Noise Free



Fast Installation



Easy Repair



Good Heat Control



Super Light



High brightness




High Refresh Rate

Note: The picture is for reference only and may not represent the final product

TECHINICAL SPECIFICATIONS

	Parameter Name	P1.5	P1.9	P2.5	P3.9
Cabinet	Material	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum	Die-cast aluminum
	Size	600x337.5x39.75	600x337.5x39.75	600x337.5x39.75	600x337.5x39.75
	Weight	4.Kg	4.Kg	4.Kg	4.Kg
	Pixel Per Panel	640x360	480*270	384*216	384*216
	Maintance	Front	Front	Front	Front
Module	LED Type	Fully flip chip COB	Fully flip chip COB	Fully flip chip COB	Fully flip chip COB
	Pixel Pitch	0.9375mm	1.25mm	1.56mm	1.87mm
	Pixel Density	1,137,777/m ²	640,000/m ²	409,600/m ²	284,444/m ²
	Module Dimension	150x168.75	150x168.75	150x168.75	150x168.75
Optical	White Balance Brightness	600cd/m ²	600cd/m ²	600cd/m ²	600cd/m ²
	Standard Color Temperature	2,000K~9,300K Adjustable	2,000K~9,300K Adjustable	2,000K~9,300K Adjustable	2,000K~9,300K Adjustable
	Viewing Angle (Hor/Ver°)	0~160	0~160	0~160	0~160
	Contrast Ratio	10000:1	10000:1	10000:1	10000:1
Electronic	Input Power <Max>	375±10%W/m ²	350±10%W/m ²	350±10%W/m ²	320±10%W/m ²
	Input Power <Typical>	175±10%W/m ²	150±10%W/m ²	125±10%W/m ²	120±10%W/m ²
	Power Voltage	100~240VAC	100~240VAC	100~240VAC	100~240VAC
	Refresh Rate	1920-3840Hz	1920-3840Hz	1920-3840Hz	1920-3840Hz
	Processing Depth	≥13bit	≥13bit	≥13bit	≥13bit
	Video Support	2K HD, 4K UHD	2K HD, 4K UHD	2K HD, 4K UHD	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	100,000 H	100,000 H	100,000 H	100,000 H
	Working Temperature/ Humidity Range (°C/RH)	-10°C~+45°C/10~70%RH	-10°C~+45°C/10~70%RH	-10°C~+45°C/10~70%RH	-10°C~+45°C/10~70%RH
	Storage Temperature / Humidity Range (°C/RH)	-20°C~+55°C/10~80%RH	-20°C~+55°C/10~80%RH	-20°C~+55°C/10~80%RH	-20°C~+55°C/10~80%RH

RT - TRANSPARENT INDOOR LED

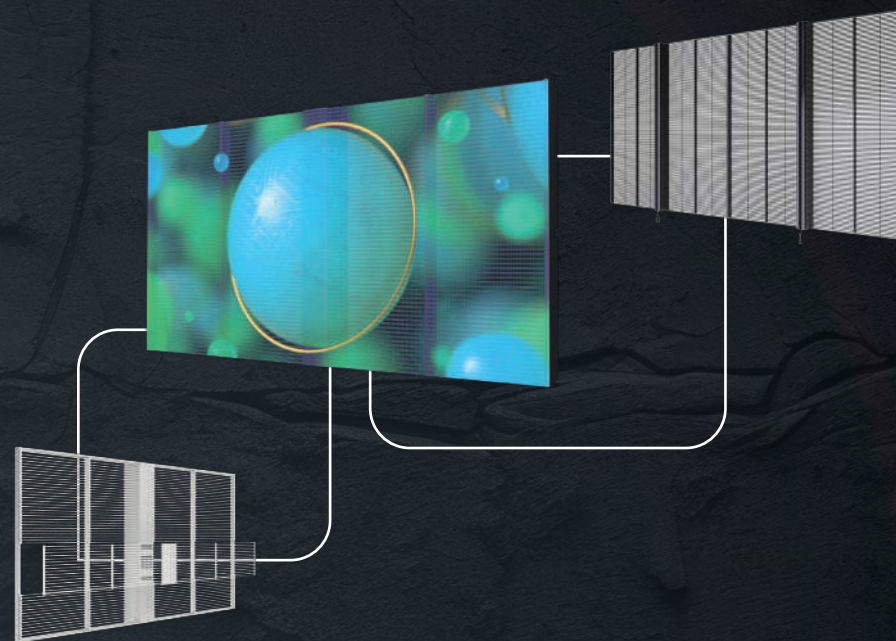

FIXED



Userfriendly



Wide View Angle



Noise Free



Fast Installation



Easy Repair



Good Heat Control



Super Light



High brightness



High Refresh Rate

Features


- 51% High Transparency
- 8 kg/m2 Lightweight Design
- Concise Structure, Efficient Installation ☒
- Front/Rear Maintenance, Quick & Easy

Note: The picture is for reference only and may not represent the final product


TECHINICAL SPECIFICATIONS

Specification	UVF2.6	UVF3.9	UVF10.4
Pixel Pitch	2.6-6.9 mm	3.9-7.8 mm	10.4-10.4 mm
Material	Profile Aluminium	Profile Aluminium	Profile Aluminium
Transparency	51%	56%	70%
LED Type	1R1G1B	1R1G1B	1R1G1B
Pixel Density	55,296 dot/m2	32768 dot/m2	9216 dot/m2
Panel Size	1000 x 1000 mm	1000 x 500 mm	1000 x 500 mm
Pixel Per Panel	55,296 dots	16,384 dots	4608 dots
Brightness	4500 nits	2000-4000Nits	5000-6500-8000 Nits
Refresh Rate	≥ 3840Hz	≥ 1920Hz-3840Hz	≥ 1920Hz-3840Hz
Weight	8 kg/m2	8 kg/m2	8 kg/m2
Peak Power Consumption	680 W/m2	350 W/m2-680 W/m2	700 W/m2
Typical Power Consumption	277 W/m2	167 W/m2-277 W/m2	283 W/m2
Viewing Angle	120°	120°	120°
Installation Method	Lifting/Fixing	Lifting/Fixing	Lifting/Fixing
Maintenance Method	Front/Rear	Front/Rear	Front/Rear
Ingress Protection	IP30	IP30	IP30
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH (No Freeze)	-10°C~+45°C/10~80%RH (No Freeze)	-10°C~+45°C/10~80%RH (No Freeze)
Storage Temperature/Humidity	-20°C~+55°C/10~85%RH (No Freeze)	-20°C~+55°C/10~85%RH (No Freeze)	-20°C~+55°C/10~85%RH (No Freeze)


TYPES OF INSTALLATIONS

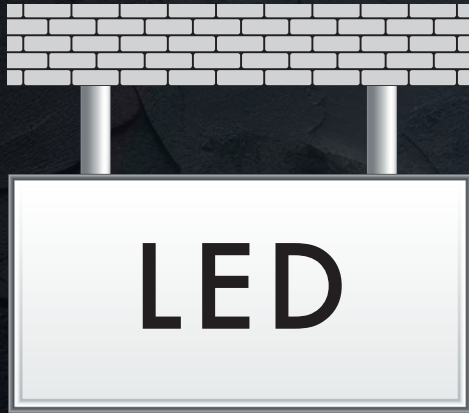


Hanging installation

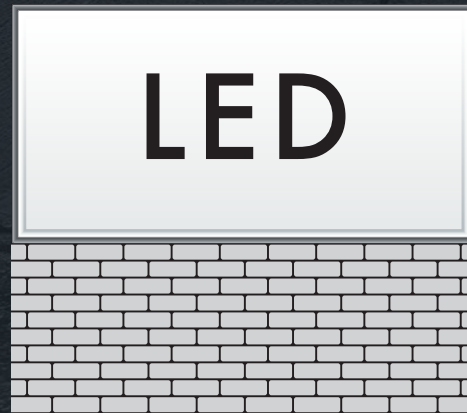

Ground installation

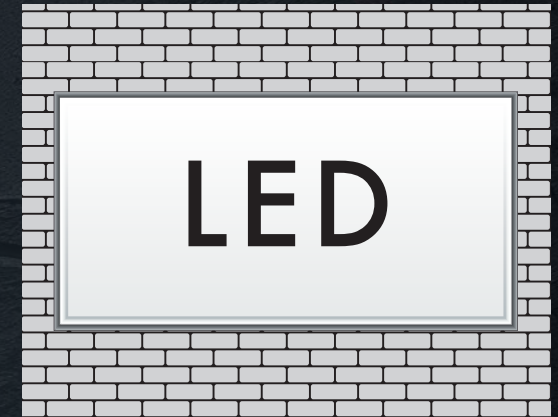

Inlay installation

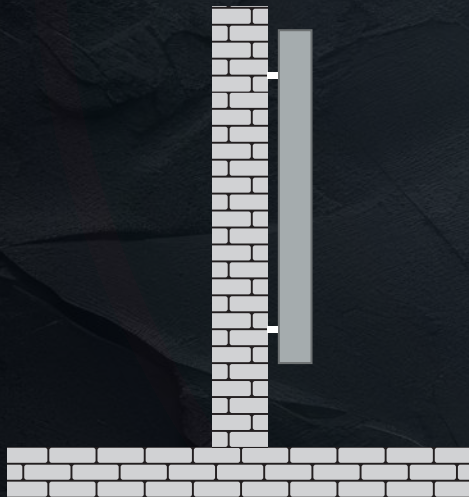

Against Wall



Pole Installation



Unipole Installation

